



**Europäisches
Patentamt**

**European
Patent Office**

**Office européen
des brevets**

REC'D 07 OCT 2004

WIPO

PCT

Bescheinigung

Certificate

Attestation

Die angehefteten Unterlagen stimmen mit der ursprünglich eingereichten Fassung der auf dem nächsten Blatt bezeichneten europäischen Patentanmeldung überein.

The attached documents are exact copies of the European patent application described on the following page, as originally filed.

Les documents fixés à cette attestation sont conformes à la version initialement déposée de la demande de brevet européen spécifiée à la page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

03077349.3

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Best Available Copy

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

R C van Dijk



Anmeldung Nr:
Application no.: 03077349.3
Demande no:

Anmeldetag:
Date of filing: 25.07.03
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Bouland, Meint Johannes
Symfonie 35
3335 BH Zwijndrecht
PAYS-BAS

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.
If no title is shown please refer to the description.
Si aucun titre n'est indiqué se référer à la description.)

Modified extension part and sweeper body for weed movers

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s)
revendiquée(s)
Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

Internationale Patentklassifikation/International Patent Classification/
Classification internationale des brevets:

E01H1/02

Am Anmeldetag benannte Vertragstaaten/Contracting states designated at date of
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HU IE IT LU MC NL
PT RO SE SI SK TR LI

MODIFIED EXTENSION PART AND SWEEPER BODY FOR WEED MOWERS

The present invention relates to a device constructed as a brush assembly consisting of a rotating extension part with applied therein sweeper bodies to mount on or underneath a so called weed mower and similar devices for mainly cleaning and/or removing weed between hard surface elements, in which the mentioned extension part has the form of a cylindrical-shaped disc, has a central mounting drill and weight saving recesses, in which in the mentioned pick-up recesses a sweeper body is mounted with a bush, which is clamped on or pressed on, which bush is provided with wire bundles or twisted steel wires, for example, a piece of steel cable.

A somewhat similar device or extension part for weed mowers is known from the European Patent "Improved Extension Part for Weed Mowers" nr. 02078082, submitted 25th of July, 2002, also of BOULAND, Meint, Johannes.

In mentioned patent document it concerns an extension part for so called weed mowers, in order to remove plant remains, weeds, dirt and such from paved surfaces and is built as a rotating device with sweeper bodies. Here, the extension part also consists of a small brush disc with six pick-up recesses for sweeper bodies in which a wire bundle or steel cable is pressed in a quadrangular cover. In the mentioned quadrangular cover a bore is applied, from which a spring loaded pin protrudes from the disc, which is provided with a bolt head and can be pulled out with a special spanner to replace the sweeper body. Replacing the sweeper bodies, which are subject to heavy wear, consisting of a quadrangular cover pressed on the end of a piece of steel cable is very frequently necessary. Working with pieces of steel cable provided with a cover as sweeper body

EPO - DG 1

25.07.2003

has proven to be very favourable in practice. These pieces of steel cable are placed in a rotating sweeper device and is accordingly frequently used in a large number of municipals on a national and international scale.

5 In practice, the aforementioned shortly described extension part with sweeper bodies has a number of disadvantages, being that for the small diameter of the brush disc of the weed mower not so many pick-up recesses are needed, a much easier replacement of the worn sweeper
10 bodies is desirable, the brush disc itself should be lighter, the brushes of the sweeper body should be easier to attach and should be done in one movement without requiring any tools, while still an optimal safety of the strong and solid attachment of the sweeper body to the
15 brush disc is guaranteed. It is important to place the bush or cover of the sweeper body in one manner in the pick-up recess of the brush disc in order to put the mentioned pin in the bore of the mentioned cover, otherwise too much time is needed to replace the sweeper body, which causes
20 annoyance and loss of time for the user.

It is the aim of the present invention to provide such a modified or improved extension part for weed mowers and such, in which the aforementioned disadvantages are solved and in which extension and sweeper parts can be put onto
25 the market in an economical way.

For this the extension part with sweeper body according to the invention is further developed and/or modified in a very inventive way, characterized in that the mentioned extension part is constructed as a cylindrical disc with
30 thickness H, diameter D, central mounting drill and at least two spoke-shaped solid wide strips, in which the intermediate segments have at least a through and through recess, in which mentioned spoke-shaped solid wide strips

positioned opposite from each other with equal angles at the centre axis near the circumference of the mentioned extension part, triangular or polygonal at the corners rounded milled-out not through and through recesses are introduced to receive the corresponding also triangular or polygonal shaped bushes or covers with sweeper body, in which locking of the mentioned bush or cover is done by means of a partly cylindrical or segmental shaped recess in an angle of the mentioned bush or cover and attached in a radial bore in the mentioned spoke-shaped solid wide strip provided with a spring-loaded blocking pin, in which the mentioned extension part is made of a material with sufficient tensile strength and elastic modulus and the material is further well mechanically processable.

The advantage is a very handy and easy to replace sweeper body, through which working with a weed mower or similar device becomes much less strenuous, in which the bush or cover with the sweeper body can be mounted in only one way, without the requirement of tools. Further, the bush or cover of the sweeper body can also have other cross-sections, which can always only be mounted in one way and which can be secured in the same way.

Further, the device according to the invention is further developed in such a way, that the mentioned spring-loaded blocking pin is constructed of an axle or shaft with a part with a larger diameter D_1 and a part with a smaller diameter D_2 , in which the transition between them shows a conical peg shoulder, which in mounted locked position stops against a clamping pin or locking pin and in which the axle part with diameter D_1 has a central bore for receiving a pressure spring, in which the radial bore of the whole is applied from the outside, this and that in such a way that in use, due to the centrifugal force,

mentioned spring-loaded blocking pin with the mentioned
peg-shoulder is thoroughly pressed against the mentioned
clamping pin or locking pin, so locking is optimally
secured.

5 The advantage is a fast and without the requirement of
tools manual replacement of the sweeper body.

 Furthermore the device according to the invention is
further developed in such a way, that the embodiment
constructed as triangular shaped bushes or covers, being
10 one of the preferred embodiments of the sweeper device,
form an equilateral triangle, in which two angles have an
equal radius of curvature R1 and the third angle has a
deviant radius of curvature R2, provided with the mentioned
recess with radius of curvature of approximately 6,5 mm
15 matching with diameter D1 of 13 mm, and that mentioned
radius of curvature R1 is approximately 8,65 mm and R2
approximately 10,15 mm.

 The advantages are a direct in one way manual, in which
no tools are required, mountable sweeper body, that in
20 operation, due to the springy axle lock, stays
operationally safe in the extension part.

 The preferred construction of the invention will be
described by way of example, and with reference to the
accompanying drawing.

25 In which:

Fig. 1 shows a front view of the extension part according
to a preferred embodiment of the invention;

Fig. 2 shows a side view of the sweeper body according to
a preferred embodiment of the invention;

30 Fig. 3 shows a cross-section over the line III of figure
2;

Fig. 4 shows a side view over the line IV-IV of the
extension part of figure 1;

Fig. 5 shows a cross section over the line V-V of the extension part of figure 1;

Fig. 6 shows a side view of the spring-loaded pin for locking the sweeper body; and

5 Fig. 7 shows a front view over the line VII of figure 6.

Figure 1 shows a front view or bottom view of the extension part 1 according to a preferred embodiment of the invention. The mentioned extension part 1 consists of a
10 disc 2 with diameter D, a central mounting bore 3, a radial or spoke-shaped solid wide strip or spoke 4, milled-out triangular not through and through recesses 5, 5¹, in which 5¹ is supplied with a sweeper body 6, remaining openings 7, which, by removing the partition walls 8 on both sides, can
15 be made into one large segment-shaped opening. The mentioned sweeper body 6 is also shown in figures 2 and 3.

Further the extension part 1 of figure 1 in the radial or spoke-shaped solid wide strip 4 is supplied with radial bores 9, in which the spring-loaded blocking pins 10 are
20 mounted, of which shooting out is avoided by the clamping pin or locking pin 11. A spring 12 is situated in bore 13, as shown in figures 6, 7. The blocking pin 10 can be pushed in with one finger, so that when replacing the sweeper body 6 tools are no longer necessary. The sweeper body 6 (figure
25 2, 3) preferably consists of a steel cable 14 on which, in this case at the end, a triangular aluminium bush or cover 15 with rounded corners is pressed. Here, the corners are rounded with radiuses R1 and R2, in which in the corner with radius of curvature R2 a recess is stamped or pressed
30 to receive the moved back blocking pin 10.

Figures 4 and 5 show a side view, respectively cross-section over the line IV-IV and V-V of figure 1.

Blocking or locking of the bush 15 of the sweeper body 10 with recess 16 is clearly shown in figures 2 and 4.

Figure 5 shows a triangular recess 5¹ for the sweeper body 10.

5 Figures 6 and 7 show in detail a side and front view the blocking pin 10 of figure 1. The bore 13 for the compression spring (not indicated) also has a diameter D2 of approximately 9 mm. The lengths and diameters are chosen in such a way that the bigger diameter of the axle bumps in
10 a suitable way against the locking pin 11 (see figure 1).

Finally it has to be emphasized, that the above description constitutes a preferred embodiment of the present invention and that further variations and
15 modifications are still possible without departing the scope of this patent description.

CLAIMS

1. Device constructed as a brush assembly consisting of
5 a rotating extension part with applied therein sweeper
bodies to mount on or underneath a so called weed mower and
similar devices for mainly cleaning and/or removing weed
between hard surface elements, in which the mentioned
extension part has the form of a cylindrical-shaped disc,
10 has a central mounting drill and weight saving recesses, in
which in the mentioned pick-up recesses a sweeper body is
mounted with a bush clamped on or pressed on, which bush is
provided with wire bundles or twisted steel wires, for
example, a piece of steel cable, characterized in that, the
15 mentioned extension part (1) is constructed as a
cylindrical disc with thickness H, diameter D, central
mounting drill and at least two spoke-shaped solid wide
strips (4), in which the segments lying in between have at
least a through and through recess, in which in mentioned
20 spoke-shaped solid wide strips positioned opposite from
each other with equal angles at the centre axis near the
circumference of the mentioned extension part (1),
triangular or polygonal at the corners rounded milled-out
not through and through recesses (5, 5¹) are introduced to
25 receive the corresponding also triangular or polygonal
shaped bushes or covers (15) with sweeper body (14), in
which locking of the mentioned bush or cover is done by
means of in an angle of the mentioned bush attached partly
cylindrical or segmental shaped recess (16) and a radial
30 bore (9) in the mentioned spoke-shaped solid wide strip (4)
provided with a spring-loaded blocking pin (10), in which
the mentioned extension part (1) is made of a material with

sufficient tensile strength and elastic modulus and the material is further well mechanically processable.

2. Device as claimed in claim 1, characterized in that, in the preferred embodiment of the extension part (1) the thickness H is approximately 22-28 mm and the diameter D approximately 129 mm.

3. Device as claimed in claim 1, characterized in that, the mentioned spring-loaded blocking pin (10) is constructed of an axle or shaft with a part with a larger diameter D1 and a part with a smaller diameter D2, in which the transition between them shows a conical peg shoulder, which in mounted locked position stops against a clamping pin or locking pin (11) and in which the axle part with diameter D1 has a central bore (13) to receive a pressure spring (12), in which the radial bore (9) of the whole is applied from the outside, this and that in such a way that in use, due to the centrifugal force, mentioned spring-loaded blocking pin (10) with the mentioned peg-shoulder is thoroughly pressed against the mentioned clamping pin or locking pin (11), so locking is optimally secured.

4. Device as claimed in claim 3, characterized in that, the mentioned diameter D1 is approximately 13 mm and length L1 approximately 16 mm and the mentioned diameter D2 approximately 9 mm and L2 approximately 18 mm.

5. Device as claimed in claims 1 and 4, characterized in that, the embodiment constructed as triangular shaped bushes or covers (15), being one of the preferred embodiments of the sweeper device, form an equilateral triangle, in which two angles have an equal radius of curvature R1 and the third angle has a deviant radius of curvature R2, provided with the mentioned recess (16) with radius of curvature of approximately 6,5 mm matching with diameter D1 of 13 mm.

6. Device as claimed in claim 5, characterized in that, the mentioned radius of curvature R1 is approximately 8,65 mm and R2 approximately 10,15 mm.

7. Device as claimed in aforementioned claims,
5 characterized in that, the material of the mentioned cylindrical disc or extension part (1) and the mentioned bush or cover (15) of the sweeper body (6) is aluminium.

8. Device as claimed in claims 1-6, characterized in
10 that, the material of the mentioned cylindrical disc or extension part (1) is a strong well processable plastic, such as polypropylene and such.

25.07.2003

ABSTRACT

(102)

The present invention relates to a modified extension part (1) and sweeper body (6) for weed mowers, in which the mentioned extension part (1) is constructed as a cylindrical disc provided with through and through recesses (7) and at least two opposite to each other not through and through milled-out recesses (5, 5¹) to receive in a very inventive way the triangular or polygonal bushes (15) with sweeper body (6) constructed as steel cable (14), and pressed on the end a preferably triangular bush or cover (15), in which locking is done by means of a spring loaded blocking pin (10) and can be pushed in with the thumb and finger to replace the sweeper body for which a recess (16) comes free and the sweeper body can be replaced, through which in a surprising easy way and without the requirements of tools the sweeper body (6) of the extension part (1) can be replaced.

(Figure 1 should be added to the abstract.)

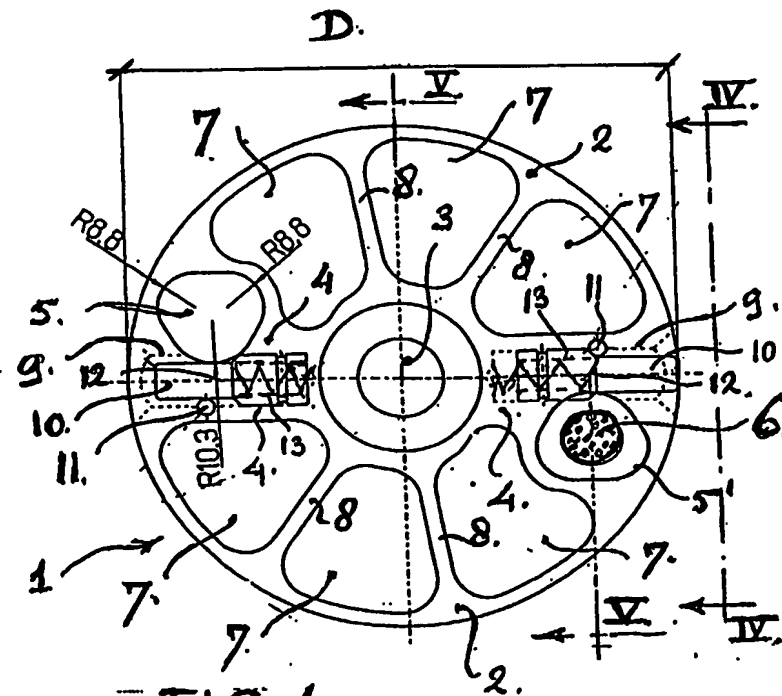


FIG. 1.

1/3.

EPO - DG 1

25.07.2003

(102)

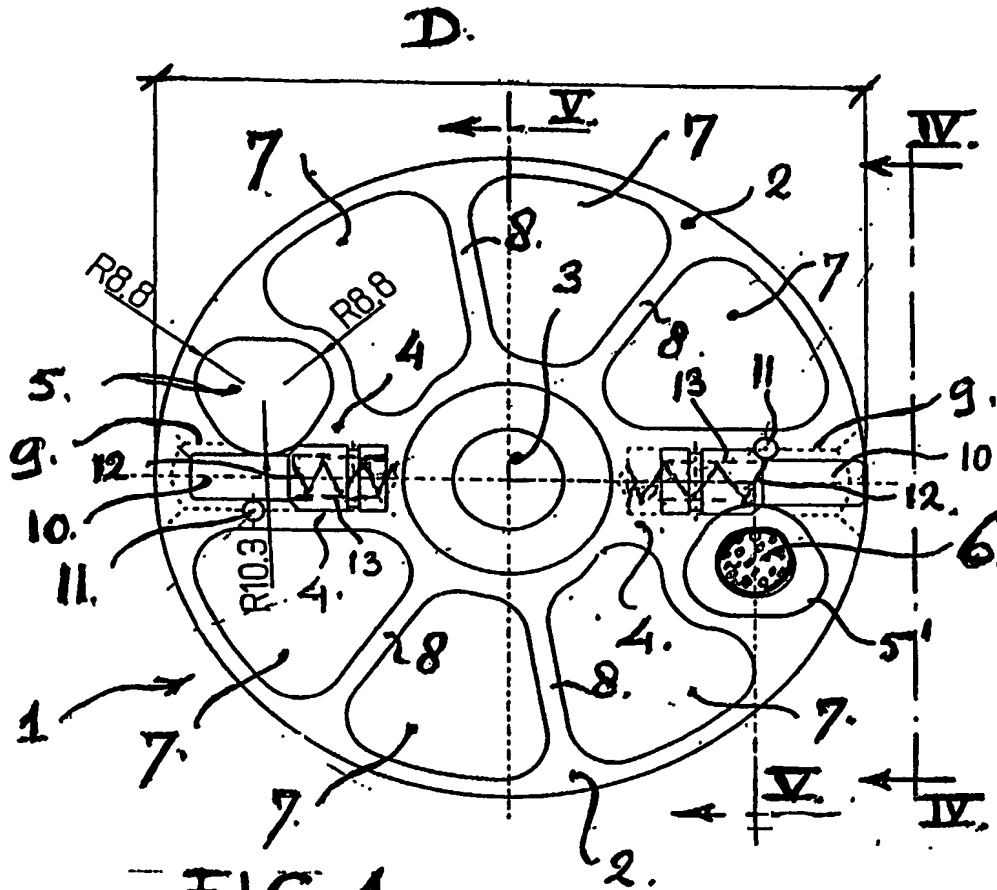


FIG. 1.

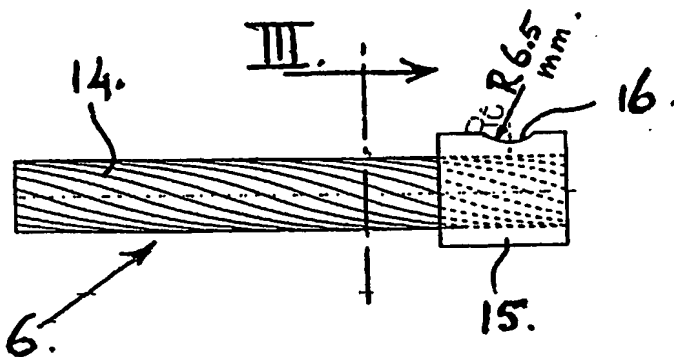


FIG. 2.

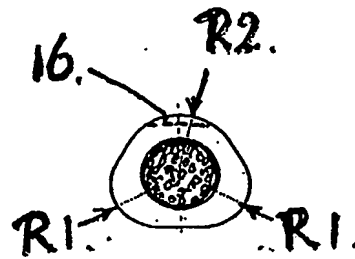


FIG. 3.

2./3.

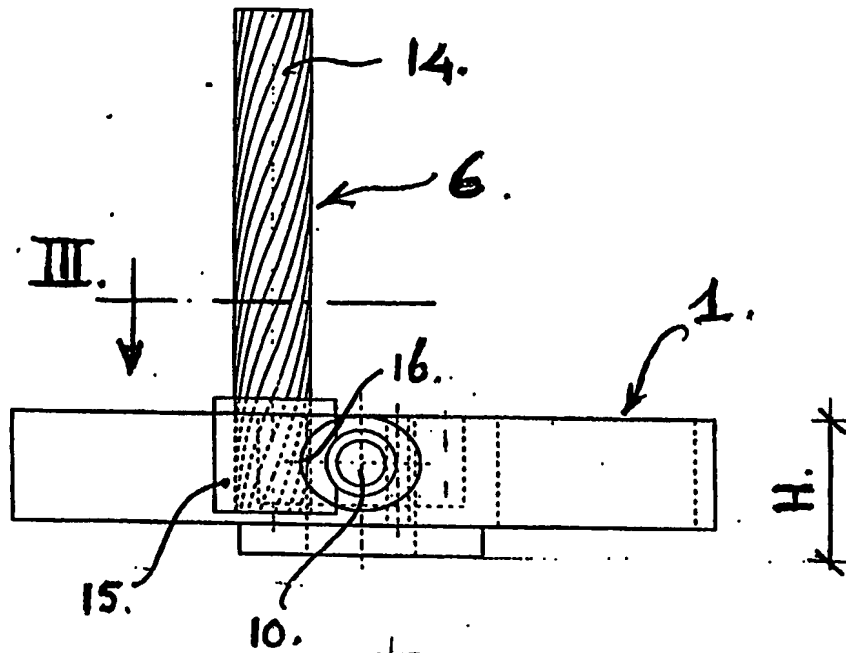


FIG. 4.

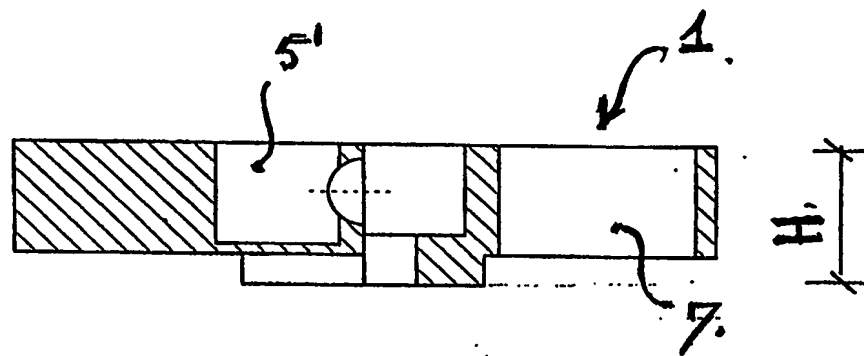


FIG. 5.

3./3

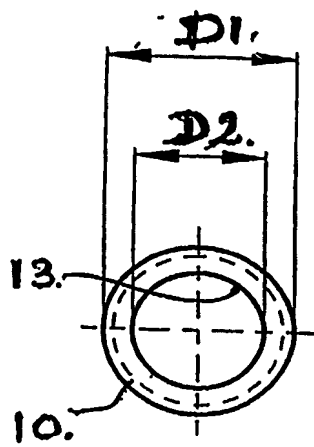


FIG. 7.

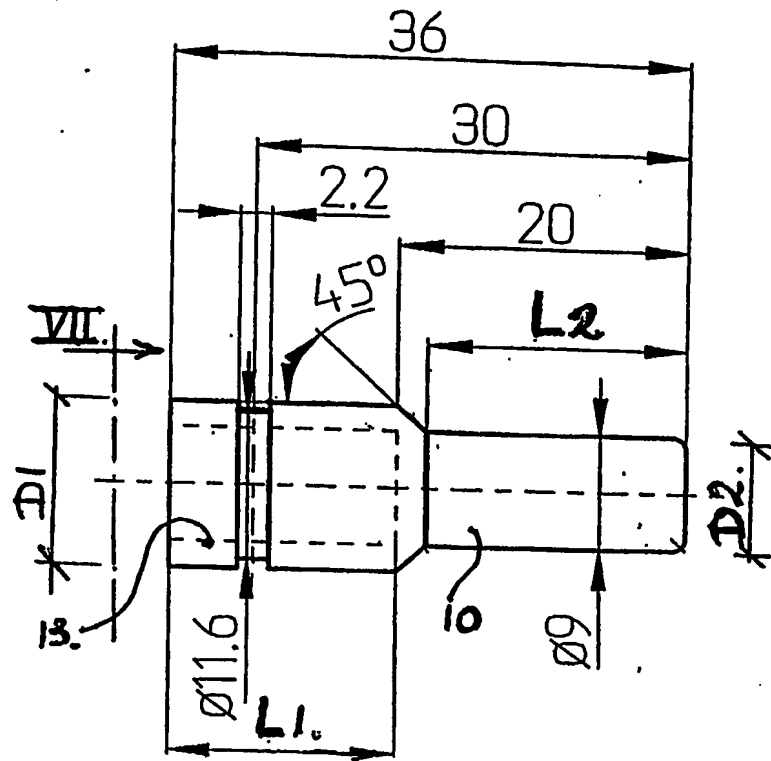


FIG. 6.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.